

VACUUM EJECTOR

SERIES ZKM / ZKX | INSTALLATION SIZE ZKM304 / ZKX304

▶ PRODUCT ADVANTAGES



- ▶ **Compact all-in-one design**
- Vacuum generation, a silencer, a vacuum filter, air control, a blow-off function, and a vacuum switch can be combined into a single compact unit.
- ▶ **Flexible and space-saving**
- The compact design and the ability to combine multiple units allow for flexible adaptation to different applications and installation situations.
- ▶ **Reliable and durable**
- The integrated filter with a self-cleaning function, robust seals, and a design that ensures a rapid response guarantee reliable and long-lasting operation.
- ▶ **Certifications: LABS / REACH / RoHS**

▶ PRODUCT KEY

ZK	M	E	101	S	AR3	D	SP	6
Series	Increased volume flow	Air-saving function	Nozzle information	Number of generators	Air and blow-off control valve	Pneumatic connection	Digital vacuum switch	Vacuum connection

► TECHNICAL DATA

Order no.	► Technical data			
	ZKM304-S-AR3-DL-SN-8	ZKM304-S-AR3-DL-SP-8	ZKME304-S-AR3-D-SN-8	ZKME304-S-AR3-D-SP-8
Max. vacuum level [kPa]	-85	-85	-85	-85
Volume flow [l/min]	135	135	135	135
Digital vacuum switch	Yes	Yes	Yes	Yes
Air-saving function	No	No	Yes	Yes
Switching output	NPN	PNP	NPN	PNP
Weight [kg]	0.21	0.21	0.21	0.21
Vacuum generator type	Vacuum nozzle	Vacuum nozzle	Vacuum nozzle	Vacuum nozzle
Nozzle version	Mega	Mega	Mega	Mega
Number of nozzles	4	4	4	4
Body type	Single module	Single module	Single module	Single module
Pneumatic connection	M5 inside	M5 inside	M5 inside	M5 inside
Number of compressed air connections	1	1	1	1
Air control valve	Yes	Yes	Yes	Yes
Air control valve version	NC	NC	NC	NC
Blow-off control valve	Yes	Yes	Yes	Yes
Voltage [V]	24	24	24	24
Solenoid valve	Yes	Yes	Yes	Yes
Electr. connection solenoid valve	Cable connection to plug	Cable connection to plug	Cable connection to plug	Cable connection to plug
Version with diode	Yes	Yes		
Connection of the vacuum switch	Male connector, M8, 4-pin	Male connector, M8, 4-pin		
Throttle check valve	No	No	No	No
Sealing material	NBR	NBR	NBR	NBR
Number of vacuum connections	1	1	1	1
Vacuum connection	8 mm	8 mm	8 mm	8 mm
Silencer	No	No	No	No
Vacuum filter	Yes	Yes	Yes	Yes
Vacuum filter type	PE filter	PE filter	PE filter	PE filter
Operating pressure max. [bar]	6	6	7	7
Max. noise level [dB]			65	65
Air consumption at 6 bar [l/min]	78	78		
Operating temperature [°C]	-20 ... +80	-20 ... +80	-20 ... +80	-20 ... +80
Certifications	LABS / REACH / RoHS	LABS / REACH / RoHS	LABS / REACH / RoHS	LABS / REACH / RoHS



VACUUM EJECTOR

SERIES ZKM / ZKX | INSTALLATION SIZE ZKM304 / ZKX304



Order no.	► Technical data			
	ZKX304-S-AR3-DL-SN-8	ZKX304-S-AR3-DL-SP-8	ZKXE304-S-AR3-D-SN-8	ZKXE304-S-AR3-D-SP-8
Max. vacuum level [kPa]	-92	-92	-92	-92
Volume flow [l/min]	109	109	109	109
Digital vacuum switch	Yes	Yes	Yes	Yes
Air-saving function	No	No	Yes	Yes
Switching output	NPN	PNP	NPN	PNP
Weight [kg]	0.21	0.21	0.21	0.21
Vacuum generator type	Vacuum nozzle	Vacuum nozzle	Vacuum nozzle	Vacuum nozzle
Nozzle version	Mega	Mega	Mega	Mega
Number of nozzles	4	4	4	4
Body type	Single module	Single module	Single module	Single module
Pneumatic connection	M5 inside	M5 inside	M5 inside	M5 inside
Number of compressed air connections	1	1	1	1
Air control valve	Yes	Yes	Yes	Yes
Air control valve version	NC	NC	NC	NC
Blow-off control valve	Yes	Yes	Yes	Yes
Voltage [V]	24	24	24	24
Solenoid valve	Yes	Yes	Yes	Yes
Electr. connection solenoid valve	Cable connection to plug	Cable connection to plug	Cable connection to plug	Cable connection to plug
Version with diode	Yes	Yes		
Connection of the vacuum switch	Male connector, M8, 4-pin	Male connector, M8, 4-pin		
Throttle check valve	No	No	No	No
Sealing material	NBR	NBR	NBR	NBR
Number of vacuum connections	1	1	1	1
Vacuum connection	8 mm	8 mm	8 mm	8 mm
Silencer	No	No	No	No
Vacuum filter	Yes	Yes	Yes	Yes
Vacuum filter type	PE filter	PE filter	PE filter	PE filter
Operating pressure max. [bar]	6	6	7	7
Max. noise level [dB]			65	65
Air consumption at 6 bar [l/min]	88	88		
Operating temperature [°C]	-20 ... +80	-20 ... +80	-20 ... +80	-20 ... +80
Certifications	LABS / REACH / RoHS	LABS / REACH / RoHS	LABS / REACH / RoHS	LABS / REACH / RoHS

▶ DIAGRAMS

ZKM304 / ZKME304

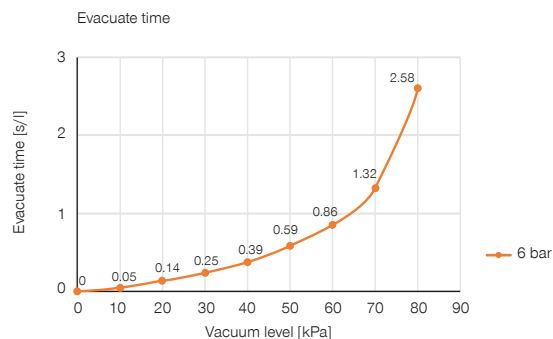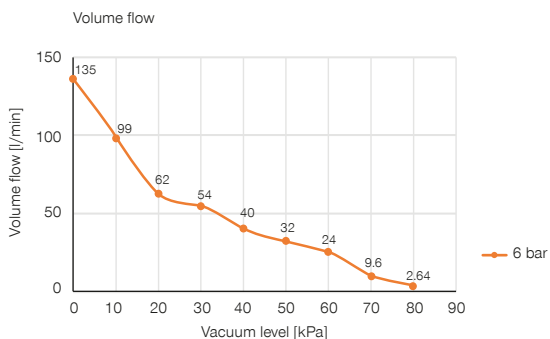


ZKX304 / ZKXE304

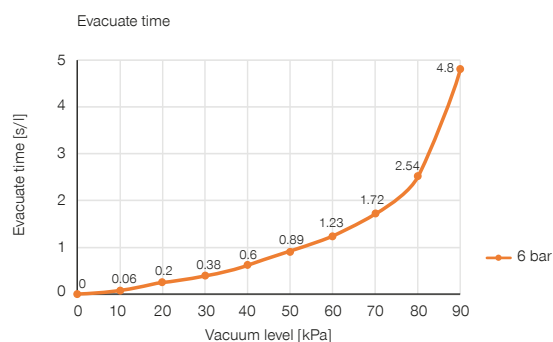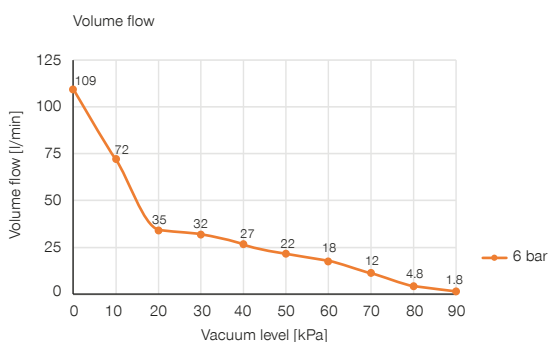


▶ TECHNICAL DRAWINGS

ZKM / ZKX304

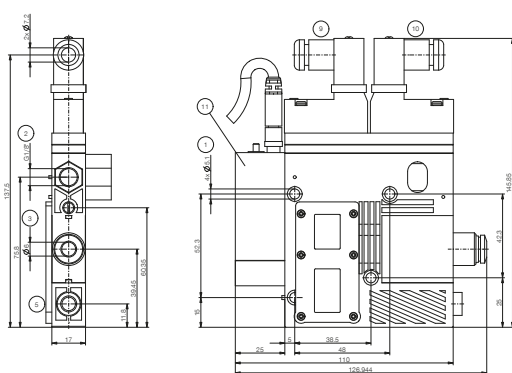

- ① Fixing
- ② Pneumatic connection
- ③ Vacuum connection
- ⑤ Exhaust air/exhaust air valve
- ⑨ Air control valve
- ⑩ Blow-off control valve
- ⑪ Vacuum switch

ZKME / ZKXE304

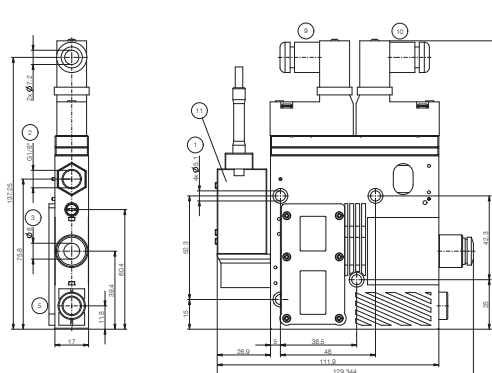

- ① Fixing
- ② Pneumatic connection
- ③ Vacuum connection
- ⑤ Exhaust air/exhaust air valve
- ⑨ Air control valve
- ⑩ Blow-off control valve
- ⑪ Vacuum switch