


POWERSTOP INDUSTRIAL SHOCK ABSORBER ACCESSORIES

STOP SLEEVE | PAH



Available for M4-M36

It is advisable to use a stop sleeve for optimal damping stroke adjustment. In this process, the end stop and the damping stroke can be adjusted individually by screwing the sleeve on the shock absorber external thread using the additional lock nut.

It is advisable to start by setting the ideal utilization of the damper by reducing the damping stroke. The end stop can subsequently be set using the position of the damper in the mounting piece.

The stop sleeve works either with or without a steel and plastic head, but not in conjunction with the bellow. The stop sleeve, including the additional lock nut contained in the scope of delivery, is made of stainless steel.

Certifications: LABS / REACH / RoHS

SENSOR STOP SLEEVE | PSH



Available for M8-M33 (with the exception of M16, M22 and M27)

In addition to the stop sleeve features, the sensor stop sleeve features inductive sensor with highly compact integration for sensing the end position of the set damping stroke. Using the sensor stop sleeve requires the use of an industrial shock absorber with a steel or plastic head (excluding the bellow).

Inductive sensor, PNP (NC), 2 m PUR cable, IP67 degree of protection.

See separate data sheet for additional information.

Certifications: LABS / REACH / RoHS

SIDE LOAD ADAPTER | PBV



Available for M8-M36 for normal and long stroke

If the industrial shock absorber is actuated with a higher angle of impact than the permissible misalignment of 2°, then a side load adapter must be provided. This increases the permissible angle of impact to 30°, which is especially advantageous for rotative applications.

The side load adapter can only be used in combination with an industrial shock absorber without a head. Here, the damper can alternatively be screwed on using the external thread of the side load adapter.

Consisting of a piston rod and housing made of stainless steel, the side load adapter is available in two protection configurations.

Protection: no protection

in a clean environment

Protection: Wiper


Against liquids and oil

Protection: Felt ring

Against dust and chips

Certifications: LABS / REACH / RoHS

CLAMPING FLANGE SCREWED ON ORTHOGONALLY | PKS



Available for M8-M36

You can use a clamping flange made of nickel-plated steel to connect the shock absorber to the structure more easily. After being fully screwed in, the shock absorber is clamped tightly to the clamping flange by screwing at a right angle to the shock absorber and fastened to the structure, which makes the locknut unnecessary.

Certifications: LABS / REACH / RoHS

CLAMPING FLANGE SCREWED PARALLEL | PKP




Available for M8-M36

You can use a clamping flange made of nickel-plated steel to connect the shock absorber to the structure more easily. After being fully screwed in, the shock absorber is clamped tightly to the clamping flange by screwing in the screwing direction of the shock absorber and fastened to the structure, which makes the locknut unnecessary.

Certifications: LABS / REACH / RoHS

LOCKNUT | PVM



Available for M4-M36

A nut made of stainless steel is supplied for each industrial shock absorber. When installing in a drilled hole with no threading, an additional nut for attachment on both sides can be ordered at the same time.

Certifications: LABS / REACH / RoHS

PRESSURE CHAMBER SEAL | PDD



Available for M4-M36



If the industrial shock absorber is being used within a pressure chamber, for instance in a pneumatic cylinder or a swivel unit, then a pressure chamber seal is required for sealing the outer contour of the shock absorber. For ideal sealing, the seal must make full-surface contact on both sides. The seal itself is made of NBR, which is applied to corrosion-protected galvanised steel for stabilization purposes.

Certifications: LABS / REACH / RoHS

INDUCTIVE PROXIMITY SWITCH

SENSOR STOP SLEEVE | PSH

Accessories	
General data	
Certification	CE / UKCA / cULus / WEEE
Basic standard	IEC 60947-5-2
Protection to IEC 60529	IP67
Function display	Yes
Protected against polarity reversal	Yes
Power indicator	No
Short-circuit-proof	Yes
Electrical data	
Connection type	Cable
Effective operating voltage [V DC]	24
Rated insulation voltage [V DC]	75
Load current capacity [mA]	150
Rated short circuit current [A]	100
Supply voltage min. [V DC]	10
Supply voltage max. [V DC]	30
Electrical version	DC, direct current
Minimum operating current [mA]	1
Load capacitance max. [μ F]	0.2
No-load current damped max. [mA]	3
Max. no-load current undamped [mA]	9
Ripple max. [%]	10
Switching output	PNP
Switching frequency [Hz]	3000
Switching function	Normally closed contact (NC)
Voltage drop [V]	2.5
Mechanical data	
Nr. of wires x diameter [mm ²]	3x0.073
Rated operating distance S_n [mm]	2.00
Installation type	flush
Housing Material	Stainless steel
Assured switching distance S_a [mm]	1.60
Cable-Ø D [mm]	2.1
Cable length [m]	2
Effective operating distance S_r [mm]	2
Depth [mm]	10
Ambient temperature range [°C]	-25 ... +70
Active surface material	PBT
Cable sheath material	PUR

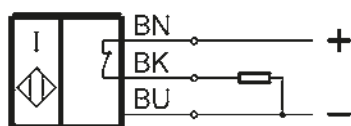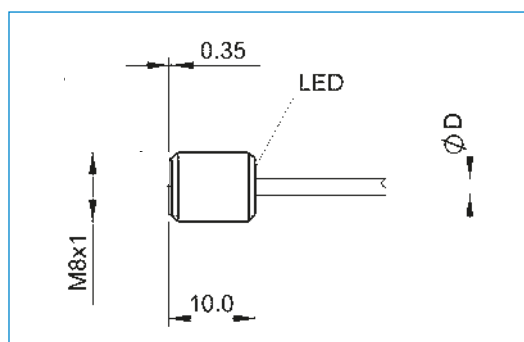

INDUSTRIAL SHOCK ABSORBERS POWERSTOP

THREAD M33X1.5

► SERIES

PowerStop®

STANDARD ENERGY	HIGH ENERGY	ADJUSTABLE ENERGY
		
The economical	The powerful	The Adjustable

► Material	Stainless steel	► Organic oil (biodegradable)	HEES
► Permitted temperature range	-10 ... +70 [°C]	► H1-certified	Yes
► Angle of Impact max.	2 [°]	► Certifications	LABS / REACH / RoHS
► Max. force at fixed stop	30 [kN]		
► Lock nut tightening torque		► Max. absolute pressure	
- Standard energy	60 [Nm]	- Standard energy	1 [bar]
- High Energy	80 [Nm]	- High Energy	10 [bar]
- Adjustable Energy	80 [Nm]	- Adjustable Energy	10 [bar]

► TECHNICAL DATA

	Design	Series	Thread	Stroke variant	Stroke	Hardness degree	Impact velocity		Energy absorption max.			Protection	Reset			Head Integrated Fix stop	Version	
					max.		min.	max.	Continuous operation		Emergency stop operation		Force		Time			
					[mm]		[m/s]	[m/s]	per stroke	per hour	per stroke		min.	max.	max.			
							[m/s]	[m/s]	[J]	[J/h]	[J]		[N]	[N]	[s]			
STANDARD ENERGY	P	SE	33X15	N	30	H	0,1	1,2	185	140.000	185	D	15	35	0,4	D	x	-A
						M	0,8	2,2	185	140.000	185	F	15	35	0,4	E	-	
						S	1,8	3,5	185	140.000	185	A	15	35	0,4	S	x	
						W	3,0	5,0	185	140.000	185	B	15	230	0,4	K	x	
HIGH ENERGY	P	HE	33X15	N	30	H	0,1	1,2	400	140.000	800	D	40	65	0,4	D	x	-A
						M	0,8	2,2	360	140.000	650	F	40	65	0,4	E	-	
						S	1,8	3,5	320	140.000	500	A	40	65	0,4	S	x	
						W	3,0	5,0	280	140.000	350	B	40	260	0,4	K	x	
ADJUSTABLE ENERGY	P	AE	33X15	N	30	H	0,1	5,0	400	140.000	400	D	40	65	0,4	D	x	-A
						F	40	65	0,4	E	-							
						A	40	65	0,4	S	x							
						B	40	260	0,4	K	x							
HIGH ENERGY	P	HE	33X15	L	50	H	0,1	1,2	400	140.000	800	D	40	65	0,8	D	x	-A
						M	0,8	2,2	360	140.000	650	F	40	65	0,8	E	-	
						S	1,8	3,5	320	140.000	500	A	40	65	0,8	S	x	
						W	3,0	5,0	280	140.000	350	A	40	65	0,8	K	x	
ADJUSTABLE ENERGY	P	AE	33X15	L	50	H	0,1	5,0	400	140.000	400	D	40	65	0,8	D	x	-A
						F	40	65	0,8	E	-							
						A	40	65	0,8	S	x							
						A	40	65	0,8	K	x							

PROTECTION

no protection D -A	Felt ring F -A	Wiper (NBR) A -A	Bellow (TPE) B -A
in a clean environment	against dust, chips, ...	against liquid, oil, ...	

TECHNICAL DRAWINGS

	Short piston rod no head N D -A	Long piston rod no head N E -A	with steel head N S -A	with plastic head N K -A	with bellow and steel head N B S -A	with bellow and plastic head N B K -A
STANDARD ENERGY	 M33x1.5, 155, 24, 41, 10, 4.5, 12, 30, 125, 570g	 165, 30, 10, 40, 125, 580g	 170, 30, 22, 31, 15, 125, 640g	 170, 30, 22, 31, 15, 125, 640g	 181, 30, 22, 39, 26, 110.5, 700g	 181, 30, 22, 39, 26, 110.5, 700g
HIGH ENERGY	 M33x1.5, 156, 24, 41, 10, 4.5, 12, 30, 126, 590g	 166, 30, 10, 40, 126, 600g	 171, 30, 22, 31, 15, 126, 660g	 171, 30, 22, 31, 15, 126, 660g	 182, 30, 22, 39, 26, 111.5, 720g	 182, 30, 22, 39, 26, 111.5, 720g
ADJUSTABLE ENERGY	 M33x1.5, 173, 24, 41, 10, 4.5, 12, 30, 17, 126, 640g	 183, 30, 10, 40, 126, 640g	 188, 30, 22, 31, 15, 126, 710g	 188, 30, 22, 31, 15, 126, 710g	 199, 30, 22, 39, 26, 111.5, 770g	 199, 30, 22, 39, 26, 111.5, 770g

	Short piston rod no head L D -A	Long piston rod no head L E -A	with steel head L S -A	with plastic head L K -A
HIGH ENERGY	 M33x1.5, 221, 24, 41, 10, 4.5, 12, 50, 171, 790g	 231, 50, 10, 60, 171, 800g	 236, 50, 22, 31, 15, 171, 860g	 236, 50, 22, 31, 15, 171, 860g
ADJUSTABLE ENERGY	 M33x1.5, 238, 24, 41, 10, 4.5, 12, 50, 171, 850g	 248, 50, 10, 60, 171, 860g	 253, 50, 22, 31, 15, 171, 920g	 253, 50, 22, 31, 15, 171, 920g




INDUSTRIAL SHOCK ABSORBERS POWERSTOP

THREAD M33X1.5


► ACCESSORIES

Pos.	Order no.	Accessories	Remarks
①	PAH33X15-A	Stop sleeve	Including 1x PVM33X15-A. Industrial shock absorber with bellow excluded.
②	PSH33X15-B	Sensor stop sleeve	Including 1x PVM33X15-A. Sensing only possible via industrial shock absorbers with steel or plastic head. Industrial shock absorber with bellow excluded. Inductive sensor, PNP (NC), 2 m PUR cable, IP67 degree of protection. See separate data sheet for additional information.
③	PBV33X15ND-A	Side load adapter standard stroke Protection: no protection	Impact angle max. 30°. Can only be used in combination with industrial shock absorber without protection and without the Short piston rod no head variant. Lock nut PVM42X15-A suitable for external thread of the side load adapter.
④	PBV33X15NF-A	Side load adapter standard stroke Protection: felt ring (felt)	Impact angle max. 30°. Can only be used in combination with industrial shock absorber without protection and without the Short piston rod no head variant. Lock nut PVM42X15-A suitable for external thread of the side load adapter.
⑤	PBV33X15NA-A	Side load adapter standard stroke Protection: wiper (NBR)	Impact angle max. 30°. Can only be used in combination with industrial shock absorber without protection and without the Short piston rod no head variant. Lock nut PVM42X15-A suitable for external thread of the side load adapter.
⑥	PBV33X15LD-A	Side load adapter long stroke Protection: no protection	Impact angle max. 30°. Can only be used in combination with industrial shock absorber without protection and without the Short piston rod no head variant. Lock nut PVM42X15-A suitable for external thread of the side load adapter.
⑦	PBV33X15LF-A	Side load adapter long stroke Protection: felt ring (felt)	Impact angle max. 30°. Can only be used in combination with industrial shock absorber without protection and without the Short piston rod no head variant. Lock nut PVM42X15-A suitable for external thread of the side load adapter.
⑧	PBV33X15LA-A	Side load adapter long stroke Protection: wiper (NBR)	Impact angle max. 30°. Can only be used in combination with industrial shock absorber without protection and without the Short piston rod no head variant. Lock nut PVM42X15-A suitable for external thread of the side load adapter.
⑨	PKS33X15-A	Clamping flange orthogonal screwed	Tightening torque of the screws max. 45 Nm.
⑩	PKP33X15-A	Clamping flange screwed in parallel	Tightening torque of the screws max. 22 Nm.
⑪	PVM33X15-A	Stainless steel locknut	Included with the industrial shock absorber.
⑫	PDD33X15-A	Pressure chamber seal	Recommended fixation with PVM33X15-A. Seal must be in full contact on both sides.


①




②

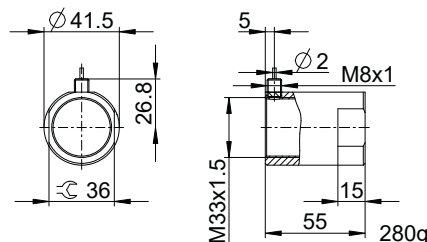


③ ④ ⑤

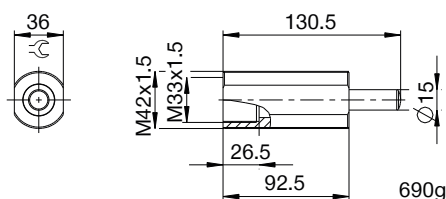


⑥ ⑦ ⑧

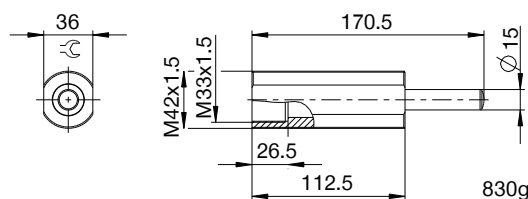


⑨

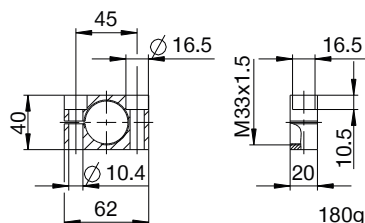


⑩

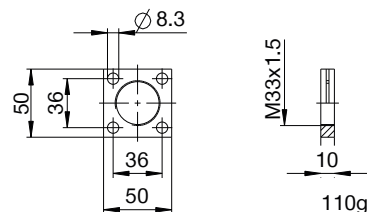

⑪



⑫



► CLASSIFICATION

P HE 33X15 L H A K -A

Design

P Industrial shock absorbers PowerStop

Series

ME Mini Energy

SE Standard Energy

HE High Energy

AE Adjustable Energy

Thread

33 Thread nominal diameter

X

15 Thread pitch (factor 10)

Stroke variant

N Standard stroke

L Long stroke

Hardness degree

H Hard (0.1 - 1.2 m/s; Adjustable Energy: 0.1 - 5 m/s)

M Medium (0.8 - 2.2 m/s)

S Soft (1.8 - 3.5 m/s)

W Supersoft (3 - 5 m/s)

Protection

D no protection

F Felt ring

A Wiper (NBR)

B Bellow (TPE)

Head

D Short piston rod no head

E Long piston rod no head

S with steel head

K with plastic head

Version

-A Versioning from a to z